

**PRV**PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

REC'D	18 JAN 2005
WIPO	PCT

**Intyg  
Certificate**

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande                      Telefonaktiebolaget LM Ericsson Stockholm SE,  
Applicant                      Svensson Bengt Mölndal SE,  
   Höök Anders Hindås SE

(81) Designerade stater      AP: all, AE, AG, AL, AM, AT, AU, AZ, BA, BB,  
Designated states              BC, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU,  
   CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB,  
   GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP,  
   KE, KG, KP, KR, KZ, LC, LI, LK, LR, LS, LT,  
   LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI,  
   NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD,  
   SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ,  
   UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW

(21) Patentansökningsnummer      PCT SE03/02102  
Patent application number

(86) Ingivningsdatum                      2003-12-30  
Date of filing

Stockholm, 2005-01-05

För Patent- och registreringsverket  
For the Patent- and Registration Office

  
Görel Gustafsson

Avgift  
Fee

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

**PATENT- OCH  
REGISTRERINGSVERKET**  
SWEDEN

Postadress/Adress  
Box 5055  
S-102 42 STOCKHOLM

Telefon/Phone  
+46 8 782 25 00  
Vx 08-782 25 00

Telex  
17978  
PATOREG S

Telefax  
+46 8 666 02 86  
08-666 02 86

0317119555

Ink. t. Patent- och reg.verket

2003 -12- 3 0

## PCT REQUEST

1/4

Huvudföretag Kassen

117713 JST

Original (for SUBMISSION) - printed on 30.12.2003 02:29:42 PM

0	For receiving Office use only	
0-1	International Application No.	PCT/ SE 03 / 0 2 1 0 2
0-2	International Filing Date	3 0 -12- 2003
0-3	Name of receiving Office and "PCT International Application"	The Swedish Patent Office PCT International Application
0-4	Form - PCT/RO/101 PCT Request	
0-4-1	Prepared using	PCT-EASY Version 2.92 (updated 01.11.2003)
0-5	Petition	
	The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty	
0-6	Receiving Office (specified by the applicant)	Swedish Patent Office (RO/SE)
0-7	Applicant's or agent's file reference	117713 JST
I	Title of invention	PLANAR NOTCH ELEMENT FEED
II	Applicant	
II-1	This person is:	applicant only
II-2	Applicant for	all designated States except US
II-4	Name	TELEFONAKTIEBOLAGET IM ERICSSON
II-5	Address:	S-126 25 STOCKHOLM
II-6	State of nationality	Sweden
II-7	State of residence	SE
		SE
III-1	Applicant and/or inventor	
III-1-1	This person is:	applicant and inventor
III-1-2	Applicant for	US only
III-1-4	Name (LAST, First)	SVENSSON , Bengt
III-1-5	Address:	Muraregatan 10
		S-431 66 MÖLNDAL
		Sweden
III-1-6	State of nationality	SE
III-1-7	State of residence	SE
III-2	Applicant and/or inventor	
III-2-1	This person is:	applicant and inventor
III-2-2	Applicant for	US only
III-2-4	Name (LAST, First)	HÖÖK, Anders
III-2-5	Address:	Kläddegårdsvägen 27
		S-430 63 HINDÅS
		Sweden
III-2-6	State of nationality	SE
III-2-7	State of residence	SE

FACSIMILE

0317119555

PCT/ SE 03 : 0 2 1 0 2

3/4

## PCT REQUEST

117713 JST

Original (for SUBMISSION) - printed on 30.12.2003 02:29:42 PM

V-5	<b>Precautionary Designation Statement</b>		
	In addition to the designations made under items V-1, V-2 and V-3, the applicant also makes under Rule 4.9(b) all designations which would be permitted under the PCT except any designation(s) of the State(s) indicated under item V-6 below. The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit.		
V-6	<b>Exclusion(s) from precautionary designations</b>	NONE	
VI	<b>Priority claim</b>	NONE	
VII-1	<b>International Searching Authority Chosen</b>	Swedish Patent Office (ISA/SE)	
VIII	<b>Declarations</b>	Number of declarations	
VIII-1	Declaration as to the identity of the inventor	-	
VIII-2	Declaration as to the applicant's entitlement, as at the international filing date, to apply for and be granted a patent	-	
VIII-3	Declaration as to the applicant's entitlement, as at the international filing date, to claim the priority of the earlier application	-	
VIII-4	Declaration of inventorship (only for the purposes of the designation of the United States of America)	-	
VIII-5	Declaration as to non-prejudicial disclosures or exceptions to lack of novelty	-	
IX	<b>Check list</b>	number of sheets	electronic file(s) attached
IX-1	Request (including declaration sheets)	4 ✓	-
IX-2	Description	18 ✓	-
IX-3	Claims	4 ✓	-
IX-4	Abstract	1 ✓	EZABST00.TXT
IX-5	Drawings	16 ✓	-
IX-7	TOTAL	43 ✓	
	<b>Accompanying items</b>	paper document(s) attached	electronic file(s) attached
IX-8	Fee calculation sheet	✓	-
IX-11	Copy of general power of attorney	reference no. 417	-
IX-17	PCT-EASY diskette	-	Diskette
IX-19	Figure of the drawings which should accompany the abstract	1	
IX-20	Language of filing of the international application	English	

0317119555

PCT/SE 03 / 0 2 1 0 2

4/4

## PCT REQUEST

Original (for SUBMISSION) - printed on 30.12.2003 02:29:42 PM

117713 JST

X-1	Signature of applicant, agent or common representative	
X-1-1	Name	ALBIHNS GÖTEBORG AB
X-1-2	Name of signatory	Gunnar BERGQUIST

## FOR RECEIVING OFFICE USE ONLY

10-1	Date of actual receipt of the purported international application	30-12-2003
10-2	Drawings:	
10-2-1	Received <input checked="" type="checkbox"/>	
10-2-2	Not received <input type="checkbox"/>	
10-3	Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application	
10-4	Date of timely receipt of the required corrections under PCT Article 11(2)	
10-5	International Searching Authority	ISA/SE
10-6	Transmittal of search copy delayed until search fee is paid	

## FOR INTERNATIONAL BUREAU USE ONLY

11-1	Date of receipt of the record copy by the International Bureau	
------	--	--

0317119555

1/2

## PCT (ANNEX - FEE CALCULATION SHEET)

Original (for SUBMISSION) - printed on 30.12.2003 02:29:42 PM

117713 JST

(This sheet is not part of and does not count as a sheet of the international application)

0	For receiving Office use only	
0-1	International Application No.	PCT/SE 03 / 0 2 1 0 2
0-2	Date stamp of the receiving Office	3 0 -12- 2003
0-4	Form - PCT/RO/101 (Annex) PCT Fee Calculation Sheet Prepared using	PCT-EASY Version 2.92 (updated 01.11.2003)
0-9	Applicant's or agent's file reference	117713 JST
2	Applicant	TELEFONAKTIEBOLAGET LM ERICSSON, et al.
12	Calculation of prescribed fees	fee amount/multiplier      Total amounts (SEK)
12-1	Transmittal fee      T	⇒      1 200
12-2-1	Search fee      S	⇒      8 720
12-2-2	International search to be carried out by	SE
12-3	International fee	
	Basic fee	
	(first 30 sheets)      b1	3 940
12-4	Remaining sheets	13
12-5	Additional amount      (X)	90
12-6	Total additional amount      b2	1 170
12-7	b1 + b2 =      B	5 110
12-8	Designation fees	
	Number of designations contained in international application	99
12-9	Number of designation fees payable (maximum 5)	5
12-10	Amount of designation fee      (X)	850
12-11	Total designation fees      D	4 250
12-12	PCT-EASY fee reduction      R	-1 210
12-13	Total International fee (B+D-R)      I	⇒      8 150
12-17	TOTAL FEES PAYABLE (T+S+I+P)	⇒      18 070
12-19	Mode of payment	cheque

## VALIDATION LOG AND REMARKS

13-2-3	Validation messages Names	Yellow Applicant 1.:Street address missing
		Green? Applicant 1.:Telephone No. missing
		Green? Applicant 1.:Facsimile No. missing
13-2-4	Validation messages Priority	Green? No priority of an earlier application has been claimed. Please verify

0317119555

PCT/SE 03 / 0 2 1 0 2

2/2

## PCT (ANNEX - FEE CALCULATION SHEET)

117713 JST

Original (for SUBMISSION) - printed on 30.12.2003 02:29:42 PM

13-2-10	Validation messages Annotate	<b>Green?</b> The name of the person signing the request or/and the capacity in which the person signs has/have not been indicated. Please be informed that some receiving Offices require that this information be present along with the signature.
---------	---------------------------------	--

0317119555

117713 JST/JST

PCT/SE 03 : 0 2 1 0 2

2003-12-30

3 0 -12- 2003

1

Planar notch element feed

## TECHNICAL FIELD

- 5 The present invention relates to a broadband non-resonant antenna device for wireless transmission of information using electromagnetic signals, comprising a metal sheet layer, forming a plane, with a slotline that comprises a first part and a second part, where the side of the second part that is the most distant from the first part transcends into a widening open-  
10 ended tapered slot in the metal sheet layer.

The present invention also relates to an antenna array comprising a plurality of said antenna devices.

## 15 BACKGROUND ART

- In systems for wireless transmission of information using electromagnetic signals, for example radar and cellular telephony or some other telecommunication area, there is a strong need for efficient antennas, both  
20 single antennas and group or array antennas. For different applications, different types of antennas with different properties are desired. For many applications, broadband properties are desired.

- When an antenna element is used in an array, i.e. when a number of antenna  
25 elements are placed in a horizontal row or a vertical column, the antenna element may be fed with varying phase, which results in that the main lobe of the array antenna radiation pattern may be directed in different directions along the array. A two-dimensional array may also be used, where a number of antenna elements are placed in horizontal rows and vertical columns. The  
30 elements may then be fed with varying phase along both the horizontal rows and the vertical columns allowing the main lobe of the array antenna

FACSIMILE

0317119555

PCT/SE 03 / 0 2 1 0 2

2

radiation pattern to be directed in different horizontal and vertical directions along the array. These "steerable" arrays are also called phased arrays.

5 Antenna elements may also be arranged in orthogonally arranged pairs, radiating in orthogonal directions. These antennas are called dual polarized antennas. An array antenna may thus be dual polarized if it consists of an equal amount of orthogonally arranged pairs of antenna elements. One reason for using a dual polarized antenna is that so-called polarisation diversity is desired. Polarisation diversity is for example desired when there is  
10 a risk that the antenna signal is reflected in such a way that the main signal and the reflected signal have opposite phases at the point of reception, causing the signal to fade out. If two polarizations are used, the risk of fading decreases as both polarizations would have to fade at the same time.

15 One kind of non-resonant antenna element which typically is used when a wide broadband performance is desired, i.e. when a performance over a wide frequency span is desired, is the so-called notch antenna, which is a kind of a so-called end-fire element. Also, when used in an array antenna, the use of notch antenna elements allows the array antenna to be directed to scan wide  
20 angles. Especially, the use of a tapered notch antenna element is preferred, which basically comprises a slot in a metal layer, which slot widens as it approaches an edge of the metal layer.

One special kind of a tapered notch antenna element is the so-called Vivaldi  
25 notch antenna element, which may be used alone or in an array.

A typical tapered notch antenna element may be formed on a first copper-clad substrate, for example a PTFE-based substrate, where the copper on one side, the feeding side, has been etched away but for a single feeding  
30 microstrip line. On the other side of the substrate, a slot is formed in the copper, which slot starts to widen as it approaches an edge of the substrate, forming a tapered slot. The tapering is typically represented by an



0317119555

PCT/SE 03 / 0 2 1 0 2

3

exponential form. The microstrip feeding line passes the slot on the other side of the substrate in such a way that the longitudinal extension of the microstrip feeding line is essentially perpendicular to the longitudinal extension of the slot. The microstrip feeding line passes the slot approximately with the length  $\lambda_g/4$ , i.e. one quarter of a wavelength in the material, a so called guide wavelength, if the feeding line is open-ended. The open-ended feeding line transforms to a short-circuited feeding line under the slot due to the  $\lambda_g/4$  length. The microstrip feeding line then couples energy to the slot, as the electromagnetic field of the microstrip feeding line is interrupted by the slot.

This design is, however, asymmetrical when looking towards the edge of the laminate where the tapered slot emerges, as there is a feeding line on one side of the laminate and a tapered slot structure on the other side. This asymmetry may result in cross-polarization at the antenna radiation pattern. One way to come to terms with this asymmetry is to mount a second laminate, without copper on one side and with an essentially identical tapered slot structure on the other side, to the first laminate in such a way that the side without copper on the second laminate faces the side with the microstrip feeding line on the first substrate. In this way the feeding line is squeezed between the two laminates, forming a stripline feeding line, with essentially identical tapered slots etched out of the copper cladding on the outer sides, forming a dual-sided notch antenna.

The basic configuration of a tapered slot antenna element of the Vivaldi type is described in the technical article "Wideband Vivaldi arrays for large aperture antennas" by Daniel H. Shaubert and Tan-Huat Chio. There the  $\lambda_g/4$  length is made as a so-called radial stub in order to achieve a larger bandwidth. The other end of the slot, opposite to the tapered part of the slot, is ended with a circular part without copper, forming a two-dimensional cavity which results in an open-ended slot line close to the feeding point. The article also describes how array antennas may be formed using a Vivaldi antenna

0317119555

PCT/ SE 03 / 0 2 1 0 2

4

element. A problem with this symmetrical Vivaldi antenna element design is that so-called parallel plate modes appear in the substrate material, i.e. undesired propagation of electromagnetic radiation. In order to suppress these parallel plate modes, metallic posts, vias, have to connect the copper  
5 on the outer sides of the laminates, surrounding the tapered slot structure.

This dual sided tapered slot antenna with vias for mode suppression ends up in a rather complicated substrate configuration, especially in an array configuration. The use of substrates renders dielectric losses and also makes  
10 the final antenna quite heavy. The use of substrate materials is also disadvantageous when an antenna is meant to be used for space applications, i.e. in a satellite, as electrostatic build-ups in the plastic material may result in discharges that could be fatal for adjacent electronic circuits. The common PTFE substrates are also relatively expensive.

15

US 5142255 describes co-planar waveguide filters etched on a substrate, which filters may be combined with a notch antenna which is fed by active components. This is however a quite narrow-banded structure, as the co-planar waveguide filters are resonant for certain narrow frequency bands.  
20 The active components may also affect the bandwidth of the structure.

Neither of the documents above disclose how a broadband, symmetrical tapered slot antenna element that does not have to be supported by a substrate may be devised.

25

#### DISCLOSURE OF INVENTION

It is an object of the present invention to provide an antenna device and manufacturing method by means of which the above-mentioned problem can  
30 be solved, in particular for providing a tapered slot antenna element, that does not have to be supported by a substrate, and that also is symmetrical.

0317119555

PCT/ SE 03 / 0 2 1 0 2

5

This object is achieved by means of an antenna device as initially mentioned, in which the device additionally comprises a feeding line in the metal sheet layer, which feeding line comprises a feeding part, with a first end and a second end, and gaps separating the feeding part from the surrounding metal sheet layer by a certain distance, where the slotline is intersected by the feeding line.

This object is also achieved by means of an array antenna device, where at least one of the included antenna devices has the features described in any one of the appended claims 1-12.

Preferred embodiments of the present invention are described in the dependent claims.

Examples of advantages that are obtained by means of the present invention are:

- A symmetrical antenna structure, thus lowering the cross-polarization level.
- Low losses, as no substrate is used.
- Simple construction, allowing a cost-effective manufacture, especially for dual polarized two-dimensional phased array antennas.
- Coherent rows and columns may be joined together and form a self-supporting structure.
- Lightweight as only a single metal layer is used for the antenna element.
- Active modules adapted for reception and/or transmission may be connected to the antenna elements by being fit in the spaces between the

0317119555

PCT/SE 03 / 0 2 1 0 2

6

antenna elements in a dual polarized array antenna configuration, allowing the antenna structure to act as a cooling flange for the active modules.

- 5 - An additional advantage is that no static charge build-up will occur, as only a single metal layer and no dielectrics are used for the antenna element.

#### BRIEF DESCRIPTION OF DRAWINGS

10

The present invention will now be described more in detail with reference to the appended drawings, where

15 Figure 1 shows a schematic front view of a first embodiment of an antenna element with a feed line according to the invention;

Figure 2 shows a schematic front view of a second embodiment of an antenna element with a feed line according to the invention;

20 Figure 3 shows a schematic front view of a third embodiment of an antenna element with a feed line according to the invention;

Figure 4 shows a schematic front view of the first embodiment equipped with retainers;

25

Figure 5a shows a schematic front view of a first connector arrangement;

Figure 5b shows a schematic front view of a second connector arrangement;

-30

Figure 6 shows a schematic perspective view of a one-dimensional array antenna with feed-lines according to the invention;

0317119555

PCT/ SE 03 / 0 2 1 0 2

7

- Figure 7 shows a schematic perspective view of a two-dimensional array antenna with feed lines according to the invention;
- 5 Figure 8a shows a schematic perspective view of a dual polarized antenna element with feed lines according to the invention;
- Figure 8b shows a schematic top view of a dual polarized antenna element with feed lines according to the invention;
- 10 Figure 9 shows a schematic top view of a dual polarized one-dimensional array antenna with feed lines according to the invention;
- Figure 10 shows a schematic top view of a dual polarized two-dimensional array antenna with feed lines according to the invention;
- 15 Figure 11a shows a schematic front view of a first one-dimensional array antenna with slots;
- 20 Figure 11b shows a schematic front view of a second one-dimensional array antenna with slots;
- Figure 12 shows a second embodiment schematic top view of a second embodiment of the dual polarized two-dimensional array antenna according to Figure 10;
- 25 Figure 13a shows a schematic perspective view of a dual polarized two-dimensional array antenna connected to a feeding module; and
- 30 Figure 13b shows a separated version of the view in Figure 13a.

0317119555

PCT/SE 03 / 0 2 1 0 2

8

## MODES FOR CARRYING OUT THE INVENTION

In Figure 1, a schematic view of an antenna device in the form of a tapered slot antenna element 1a, for example of the "Vivaldi" type, is shown. The tapered slot antenna 1a comprises a metal layer 2 with a slotline 3 having a first part 3a and a second part 3b, which slotline 3 is fed by a feed line 4. An essentially two-dimensional slot cavity 5 terminates the first part 3a of the slotline 3. The second part 3b of the slotline 3 transcends into an open-ended tapered slot 6, thus forming a radiating element. The tapered slot antenna element 1a is made from only one single metal layer 2, forming a ground plane, where the feed line 4 is incorporated in this metal layer. The feed line is of the type co-planar waveguide (CPW), which comprises a feeding part 7 in the form of a centre conductor 7 separated from the surrounding ground plane 2 by gaps 8, 9. The feed line 4 and its centre conductor 7 intersects the slotline 3, dividing it into the first part 3a and the second part 3b. This type of transmission line is essentially a TEM (transverse electric and magnetic field) transmission line, similar to a coaxial line. The use of this CPW feed 4 makes it possible to manufacture both the feed line 4 and the tapered slot 6 in the same metal layer 2, which may be a sheet of metal, forming a metal sheet layer 2.

The centre conductor 7 of the feed line 4 has a first end 7a and a second end 7b, which first end 7a intersects the slotline 3. The second end 7b runs towards an edge 2' of the metal sheet layer 2. The first end 7a may end in many ways, it may end short-circuited as shown for the antenna element 1a in Figure 1, i.e. connected directly to the ground plane 2 directly after having passed the slotline 3, dividing it into the two parts 3a, 3b.

In Figure 2, a tapered slot antenna element 1b is shown where the centre conductor 7 passes the slotline 3 with the length L1, dividing the slotline 3 into the two parts 3a, 3b. The passing length L1 of the centre conductor 7 approximately equals  $\lambda_g/2$ , i.e. one quarter of a wavelength in the material, a

0317119555

PCT/SE 03 / 0 2 1 0 2

9

so called guide wavelength, where the wavelength corresponds to the centre frequency of the antenna frequency band, and the centre conductor 7 is short-circuited at its end point 7a, resulting in that the short-circuited centre conductor 7 transforms back to be short-circuited at the slot feed point 10 as well.

In Figure 3, a tapered slot antenna element 1c is shown where the centre conductor 7 passes the slotline 3, dividing it into the two parts 3a, 3b. The passing length L2 of the centre conductor 7 approximately equals  $\lambda_g/4$ , and the centre conductor 7 is open-ended at its end point 7a where it passes into a two-dimensional feed cavity 11, similar to the slot cavity 5 which terminates the slotline 3 in its end that is most distant to the tapered slot 6. Hence the open-ended centre conductor 7 transforms to be short-circuited at the slot feed point 10.

The manufacture of such an antenna element 1a, 1b, 1c may be accomplished by means of punching of a metal sheet. Since the metal sheet 2 then will be divided in two separate parts 12, 13, it may be necessary to mechanically support the structure at some positions in order to maintain the overall structure and function of the antenna element 1a, 1b, 1c as illustrated with the antenna element 1a in Figure 4, where the embodiment according to Figure 1 is shown. In the embodiment according to Figure 3, the centre conductor 7 will constitute a separate part which will have to be supported in the same way in relation to the rest of the structure. The supporting as shown in Figure 4 is preferably done at "non-critical" positions, i.e. the supporting metal or plastic retainers 14a, 14b, 14c should be placed where they do not affect the electrical field in any evident way. Either the material of the retainers 14a, 14b, 14c is chosen to have such dielectric properties that it does not affect the electrical performance, or else the feeding line 4 is matched to adapt to the retainers 14a, 14b, 14c. Further, the retainers 14a, 14b, 14c may also for example form bridges (not shown) between the two

0317119555

PCT/SE 03 / 0 2 1 0 2

10

parts 12, 13, avoiding the centre conductor 7, and may then be made of a metal.

5 The centre conductor 7, ending at one edge 2' of the metal sheet 2 as shown in detail in Figure 5a, may be connected to any appropriate external feeding. Some kind of connector 15, for example an SMA connector (a screw mounted type of RF connector) or an SMB connector (a snap-fit type of RF connector) may be used. The inner conductor 16 of the connector 15 is mounted to the second end 7b of the centre conductor 7 by means of for example soldering, and the outer conductor 17 of the connector 15, i.e. its ground, is mounted to the metal sheet ground plane 2, also by means of for example soldering. A corresponding connector 18 is mounted to an external feeding 19, for example a distributing feeding network.

15 In Figure 5b, a feeding module 20 adapted for reception and/or transmission, for example a so-called T/R module (transmit/receive module), is placed between the antenna and the external feeding via intermediate connectors 21, 22, which feeding module 20 for example may be of an active, i.e. comprising amplifying units, or a passive type. The feeding module 20 may also comprise variable phase-shifters and power attenuators. The feeding module 20 may be connected to a control unit (not shown) for power and phase control. The co-planar waveguide feed that is used, is also convenient for direct integration with a feeding module 20, omitting the first pair of connectors 17, 21 in Figure 5b. The feeding modules 20 may also be a part of the external feeding 19, which then constitutes a feeding module in itself.

30 By punching a plurality of antenna elements from a longer rectangular sheet of metal 23, a one-dimensional array antenna 24, as shown in Figure 6, consisting of several of the antenna element 1a described above may be manufactured, which array antenna 24 may have centre conductors 7 with appropriate connectors 15 attached at their edges as described above.

These connectors 15 may then be attached to corresponding connectors 18



0317119555

PCT/SE 03 / 0 2 1 0 2

11

- mounted at an external feeding 19, for example a distribution network. Intermediate feeding modules 20 as shown in Figure 5b (not shown in Figure 6), or modules integrated in the external feeding 19, may also be used, which modules may be adapted to feed the antenna elements 1a in the array antenna 24 in such a way that the main lobe of the array antenna radiation pattern may be directed in different directions along the array. In order to make the array antenna more stable, the sheet may be bent, forming small corresponding indents 25a, 25b, 25c, 25d, as shown in Figure 6.
- 5
- 10 The array antenna 24 showed in Figure 6 is equipped with antenna elements 1a with a CPW feeding line according to the embodiment shown in Figure 1. Of course, any one of the antenna elements 1a, 1b, 1c with their respective CPW feeding embodiments described above with reference to the Figures 1-3 may be used here and in the following array antenna examples, where the
- 15 embodiment according to Figure 1 with the tapered slot antenna element 1a is shown. The retainers 14a, 14b, 14c described in association with Figure 4 may wherever necessary be applied in any appropriate way in this and the following antenna embodiment examples.
- 20 By placing a plurality of array antennas 24 according to the above beside each other, a two-dimensional array antenna 24' consisting of rows 26a, 26b, 26c and columns 27a, 27b, 27c may be obtained, as shown in Figure 7. The rows 26a, 26b, 26c may have different displacement relative to each other depending on the desired radiation properties. As described in the above,
- 25 this plurality of array antennas 24 are connected to an external feeding 19 via appropriate connectors 15, 18, where the external feeding 19 may be a distribution net. Intermediate feeding modules as shown in Figure 5b (not shown in Figure 7), or modules integrated in the external feeding 19, may also be used, which modules may be adapted to feed the antenna elements
- 30 1a in the two-dimensional array antenna rows 26a, 26b, 26c and columns 27a, 27b, 27c in such a way that the main lobe of the array antenna radiation

0317119555

PCT/SE 03 / 0 2 1 0 2

12

pattern may be directed in different directions along the array antenna rows 26a, 26b, 26c and columns 27a, 27b, 27c.

5 In Figure 8a and 8b, a dual polarized antenna 28 is shown. The dual polarized antenna element 28 comprises two orthogonally arranged antenna elements 1a' 1a". The metal sheets 2a, 2b that constitute the dual polarized antenna 28 are here placed in such a way that they cross each other. Corresponding mounting slots (not shown) have to be made in the metal sheets in order to allow this placing. The mounting slots will be further  
10 discussed later. It is to be noted, however, that the feeding lines 4a, 4b, will have to be separated vertically in order to avoid that the centre conductors 4a, 4b come in contact with each other in the intersection. Preferably, the crossing point 29, shown in the top view in Figure 8b, is soldered together, in order to ensure a good electrical connection between the metal sheets 2a,  
15 2b. The dual polarized antenna 28 radiates main lobes that are orthogonal relative to each other, and may also be fed in such a way that it radiates circular polarization.

By adding orthogonal antenna elements 30, 31, 32 to the one-dimensional array antenna 24 shown in Figure 6, a one-dimensional dual polarized array antenna 33 as shown in the top view in Figure 9 is obtained. The antenna elements are thus arranged in orthogonal pairs 28', 28'', 28''', according to the dual polarized antenna element shown in Figure 8a and Figure 8b, radiating in orthogonal directions. Corresponding mounting slots (not shown)  
20 have to be made in the metal sheets in order to allow this placing. The antennas 30, 31, 32 are placed in such a way that they cross each other. Preferably, the crossing points 34a, 34b, 34c are soldered together, in order to ensure a good electrical connection.

30 The indents 25a-d shown in Figure 6 and 7, are not shown in Figure 9-13. Due to the more stable structure due to the orthogonally placed antenna

0317119555

PCT/SE 03 / 0 2 1-0 2

13

elements, the indents may be omitted in the above example and in the following examples.

By orthogonally adding one-dimensional array antennas 24, according to the one shown in Figure 6, to the two-dimensional array antenna 25 shown in Figure 7, a two-dimensional dual polarized array antenna 35, as shown in the top view in Figure 10 is obtained, i.e. the antenna elements are arranged in orthogonal pairs in two dimensions, radiating in orthogonal directions. The metal sheets 36, 37, 38; 39, 40, 41 are here placed in such a way that they cross each other, the crossing points 42a, 42b, 42c, 42d, 42e, 42f, 42g, 42h, 42i may be either between each antenna element, or in the middle of each antenna element. Corresponding mounting slots (not shown) have to be made in the metal sheets in order to allow this placing. Preferably, the crossing points 42a, 42b, 42c, 42d, 42e, 42f, 42g, 42h, 42i are soldered together, in order to ensure a good electrical connection.

A one-dimensional array antenna 24, equipped with mounting slots 43, 44 as discussed above, is shown in two different embodiments in Figure 11a and Figure 11b. The mounting slots 43 of one array antenna row are shown with a continuous line, and the mounting slots 44 of a corresponding array antenna row are shown with a dotted line. The array antenna rows with dotted line mounting slots 44 are placed orthogonally onto the array antenna rows with continuous line mounting slots 43, allowing the slots 43, 44 to grip into each other. The slots 43, 44 may also be made in the middle of each tapered slotline 3 (not shown), but then the feeding lines 4 will have to be separated vertically in order to avoid that they come in contact with each other in the intersection as described above with reference to Figure 8a and 8b.

In Figure 11a, the centre conductors 7 of the CPW feed lines 4 run to the edge 45 of the metal sheet. In Figure 11b, the centre conductor 7 of the CPW feed line 4 stops before it reaches the edge 45 of the metal sheet. The latter

0317119555

PCT/ SE 03 / 0 2 1 0 2

14

configuration will be discussed further below. It is to be noted, however, that the embodiment according to Figure 11b does not result in separate metal parts that have to be retained in relation to each other in some appropriate way, but instead results in a coherent structure.

5

In Figure 12, another dual polarized two-dimensional antenna array 46 is shown. Punched metal sheets 47, 48, 49, 50, 51, 52 are here arranged in a zigzag pattern, and are arranged in such a way that an arrangement similar to the embodiment according to that in Figure 10 is obtained. The crossing points 53a, 53b, 53c, 53d, 53e, 53f, 53g, 53h, 53i are here positioned between the foldings in the zigzag pattern, which foldings and crossing points 53a, 53b, 53c, 53d, 53e, 53f, 53g, 53h, 53i may be positioned either between each antenna element or in the middle of each antenna element. Preferably, the crossing points 53a, 53b, 53c, 53d, 53e, 53f, 53g, 53h, 53i are soldered together, in order to ensure a good electrical connection.

All these antenna elements in the dual polarized embodiments described above are, as in the previous single polarized cases, connected to an external feeding 19, 20 via appropriate connections, where the external feeding 19, 20 may be a distribution net which may comprise means adapted for reception and/or transmission, for example a so-called T/R module (transmit/receive module), that may be of an active or a passive type. The feeding 19, 20 may also comprise variable phase-shifters and power attenuators. The feeding 19, 20 may be connected to a control unit (not shown) for power and phase control. The antenna elements 1a, 1a', 1a'', 1b, 1c, 30, 31, 32 in the antenna array 24, 24', 33, 35, 46 columns and rows may thus be fed in such a way that the main lobe of the array antenna radiation pattern may be directed in different directions along the array columns and rows for each one of the two polarizations. The antenna elements in the dual polarized embodiments described above may also be fed in such a way that circular polarization is obtained.

0317119555

PCT/SE 03 / 0 2 1 0 2

15

Figure 13a and Figure 13b disclose one possibility to feed a dual polarized array antenna 54 according to Figure 10 or Figure 12 having centre conductors 7 according to Figure 11b, not extending all the way down to the edge 45 of the metal sheet. In Figure 13 b, the structure is shown separated, as indicated with arrows A1 and A2. An insertion feeding module 55, essentially cubic or shaped as a rectangular parallelepiped, fitting into the space formed by the surrounding antenna 54 elements 56, 57, is placed in each such space formed by the array antenna 54 grid pattern. The insertion feeding module 55 is adapted for reception and/or transmission and may for example may be of an active or a passive type. The insertion feeding module 55 may also comprise a feeding network, variable phase-shifters and power attenuators. The insertion feeding module 55 may be connected to a control unit for power and phase control (not shown). The insertion feeding module 55 has at least one coupling conductor 58 for connecting the antenna element 56, 57 centre conductor 7, where the coupling conductor 58 has the length  $L_3$  which essentially equals  $\lambda_g/4$ , enabling a reliable connection to be achieved. Having the length  $\lambda_g/4$  of the coupling conductor 58 results in that there does not have to be a perfect galvanic contact between the coupling conductor 58 and the corresponding centre conductor 7. The antenna element centre conductor 7 in Figure 11b is shown open ended, but may be short-circuited if it is compensated for in the coupling.

If the insertion feeding module 55 dissipates heat, for example as active components gets warm when in use, the antenna structure 54 may be used as a cooling flange for the insertion feeding modules 55. Then certain corresponding areas 59, 60 may be chosen for heat transfer from the insertion modules to the antenna structure. These areas are preferably coated with a heat-conducting substance of a known kind.

Being used in a dual polarized antenna 54 as shown in Figure 13a, each insertion feeding module 55 have two coupling conductors (not shown), feeding two antenna elements 56, 57 with different polarizations. This kind of

0317119555

PCT/ SE 03 / 0 2 1 0 2

16

feeding of the antenna elements 56, 57 with coupling conductors 58 coupling to a centre conductor 7 may be applied for other embodiments of the invention as well. The insertion feeding modules 55 used in the array antenna 54 may also be arranged for feeding the antenna elements 56, 57 in  
5 such a way that circular polarization is obtained.

It is to be understood that the plane against which the insertion feeding modules rest, is no ground plane. The plane may be equipped with appropriate connectors that connect each insertion feeding module 55 to its  
10 feeding, for example comprising RF, power and/or control signals (not shown).

The invention will not be limited to the embodiments discussed above, but can be varied within the scope of the appended claims. For example, the  
15 indents 24a, 24b, 24c, 24d of the array antenna metal sheets may be arranged and shaped in many way, the one indent design shown is only one example among many.

Further, the array antenna configuration according to Figure 6 may be made  
20 without the retainers 14a, 14b, 14c shown in Figure 4, as the separate metal parts 21a, 21b, 21c, 21d making up the array antenna 21 may be individually fastened to the external feeding 19 in an appropriate way, for example by means of gluing. Additional stabilizing is also added by means of the connectors 15, 18.

25

The array antennas 24, 24', 33, 35, 46, 54 described above may be additionally supported by placing an appropriate supporting material between the metal sheet or metal sheets forming the array antenna. Such a material would preferably be of a foam character, such as polyurethane foam, as it  
30 should be inexpensive and not cause losses and disturb the radiation pattern.

0317119555

PCT/ SE 03 / 0 2 1 0 2

17

Different feeding modules 19, 20, 55 have been discussed. Other ways to connect active or passive feeding modules to the antenna elements are conceivable within the scope of the invention.

- 5 The slot form of the antenna elements may vary, the tapered slot 6 may have different shapes, it may for example be widened in steps. The first part 3a of the slot may end in many ways, for example the mentioned two-dimensional cavity 5 or a short-circuit to the metal sheet layer 2 at a suitable distance from the feed point 10.

10

The manufacturing of the antenna elements may be performed in many ways, punching has been mentioned above. Other examples are laser-cutting, etching, machining and water-cutting. If the manufactured antenna will consist of a plurality of separated parts, these parts may first be  
15 connected by small connecting bars, allowing easy handling. When the antenna is correctly and safely mounted, these small bars may be removed.

- In another embodiment, not illustrated, the antenna structure may be etched from a piece of substrate, for example a PTFE-based substrate. The metal is  
20 completely removed from one side of the substrate and the metal on the other side then constitutes the antenna element. Another similar piece of substrate without metal on both sides is also used, where the antenna element is squeezed between the two substrates. The piece of substrate without metal is used to create symmetry. As there is only one metal layer,  
25 no parallel-plate modes will be created.

- In all the embodiments shown above, the characteristic impedance of the CPW feeding line 4 will be determined by the width of the centre conductor 7, the width of the slotline 3 and the thickness of the metal sheet 2. The slotline  
30 is preferably essentially straight, but may also be slightly tapered.

0317119555

PCT/SE 03 / 0 2 1 0 2

18

The tapered slot antenna described in the embodiments may be of the type Vivaldi notch element. Other types of antenna elements which may be made in a single metal layer and fed by a feeding line according to the invention are conceivable, for example a dipole antenna of a previously known type.

5



0317119555

PCT/SE 03 / 0 2 1 0 2

117713 JST/JST

2003-12-30

19

## CLAIMS

1. A broadband non-resonant antenna device for wireless transmission of information using electromagnetic signals, comprising a metal sheet layer (2), forming a plane, with a slotline (3) that comprises a first part (3a) and a second part (3b), where the side of the second part (3b) that is the most distant from the first part (3a) transcends into a widening open-ended tapered slot (6) in the metal sheet layer (2), characterized in that the device additionally comprises a feeding line (4) in the metal sheet layer (2), which feeding line (4) comprises a feeding part (7), with a first end (7a) and a second end (7b), and gaps (8, 9) separating the feeding part (7) from the surrounding metal sheet layer (2) by a certain distance, where the slotline (3) is intersected by the feeding line (4).
2. Antenna device according to claim 1, characterized in that the feeding part divides the slotline (3) into the first part (3a) and the second part (3b) of the slotline (3).
3. Antenna device according to claim 1 or 2, characterized in that the first end (7a) of the feeding part (7) is connected to the metal sheet layer (2) after having intersected the slotline (3).
4. Antenna device according to any of the preceding claims, characterized in that the tapered slot (6) has an exponential form.
5. Antenna device according to any of the preceding claims, characterized in that the side of the first part (3a) of the slotline (3) that is the most distant from the second part (3b) transcends into an essentially two-dimensional cavity (5).

0317119555

PCT/ SE 03 / 0 2 1 0 2

20

6. Antenna device according to claim 5, characterized in that the essentially two-dimensional cavity (5) has a circular form.
7. Antenna device according to any of the claims 1 to 4, characterized in that the side of the first part (3a) of the slotline (3) that is the most distant from the second part (3b) is short-circuited to the metal sheet layer (2).
8. Antenna device according to any of the preceding claims, characterized in that the first end (7a) of the feeding part (7) is positioned past the slotline (3), with the gaps (8, 9) continuing at each of the sides of the feeding part (7).
9. Antenna device according to claim 8, characterized in that the gaps (8, 9) are joined at the first end (7a) of the feeding part (7).
10. Antenna device according to claim 9, characterized in that the joining part of the gaps (8, 9), at the first end (7a) of the feeding part (7), forms an essentially two-dimensional cavity (11).
11. Antenna device according to any of the preceding claims, characterized in that the second end (7b) of the feeding part extends to an edge (2') of the metal sheet (2).
12. Antenna device according to any of the claims 1-6, characterized in that an external feeding (19, 20, 55) is attached to the second end (7b) of the feeding part (7).
13. A broadband non-resonant array antenna comprising a plurality of similar antenna devices (1a, 1b, 1c), for wireless transmission of information using electromagnetic signals, characterized in that at

0317119555

PCT/SE 03 / 0 2 1 0 2

21

least one of the included antenna devices (1a, 1b, 1c) has the features described in any one of the claims 1-12.

5 14. Array antenna according to claim 13, characterized in that the antenna devices (1a, 1b, 1c) are positioned beside each other on the metal sheet layer (23).

10 15. Array antenna according to claim 14, characterized in that a plurality of metal sheet layers (23), comprising the antenna devices (1a, 1b, 1c) positioned beside each other, are placed in a plurality of rows (26a, 26b, 26c).

15 16. Array antenna according to any one of the claims 13-15, characterized in that for each included antenna device (1a', 1a, 1b, 1c), one orthogonally arranged antenna device (1a"; 30, 31, 32) is arranged.

20 17. Array antenna according to any one of the claims 13-16, characterized in that the external feeding comprises at least one feeding module (19, 20, 55) of an active or a passive type connected to at least one of the antenna devices (1a, 1a', 1a", 1b, 1c, 30, 31, 32, 56, 57).

25 18. Array antenna according to claim 17, characterized in that the at least one feeding module (19, 20, 55) comprises a variable phase-shifter and/or power attenuators.

19. Array antenna according any one of the claims 17 or 18, characterized in that the at least one feeding module (19, 20, 55) may be connected to a control unit for power and phase control.

30 20. Array antenna according any one of the claims 17-19, characterized in that the at least one feeding module (19, 20, 55) is

0317119555

PCT/SE 03 / 0 2 1 0 2

22

electromagnetically coupled to at least one of the antenna devices (1a, 1a', 1a'', 1b, 1c, 30, 31, 32 56, 57).

21.           Array antenna according any one of the claims 16-20,  
5   characterized in that the at least one feeding module (19, 20, 55) is  
arranged to feed the at least one antenna device (1a, 1a', 1a'', 1b, 1c, 30, 31,  
32, 56, 57) in such way that circular polarization is obtained.

0317119555

117713 JST/JST

2003-12-30

PCT/ SE 03 / 0 2 1 0 2

23

## ABSTRACT

The present invention relates to a broadband non-resonant antenna device for wireless transmission of information using electromagnetic signals, comprising a metal sheet layer, forming a plane, with a slotline that comprises a first part and a second part. The side of the second part that is the most distant from the first part transcends into a widening open-ended tapered slot in the metal sheet layer. The device additionally comprises a feeding line in the metal sheet layer. The feeding line comprises a feeding part, with a first end and a second end, and gaps separating the feeding part from the surrounding metal sheet layer by a certain distance, where the slotline is intersected by the feeding line.

(Fig. 1)



0317119555

PCT/SE 03 / 0 2 1 0 2

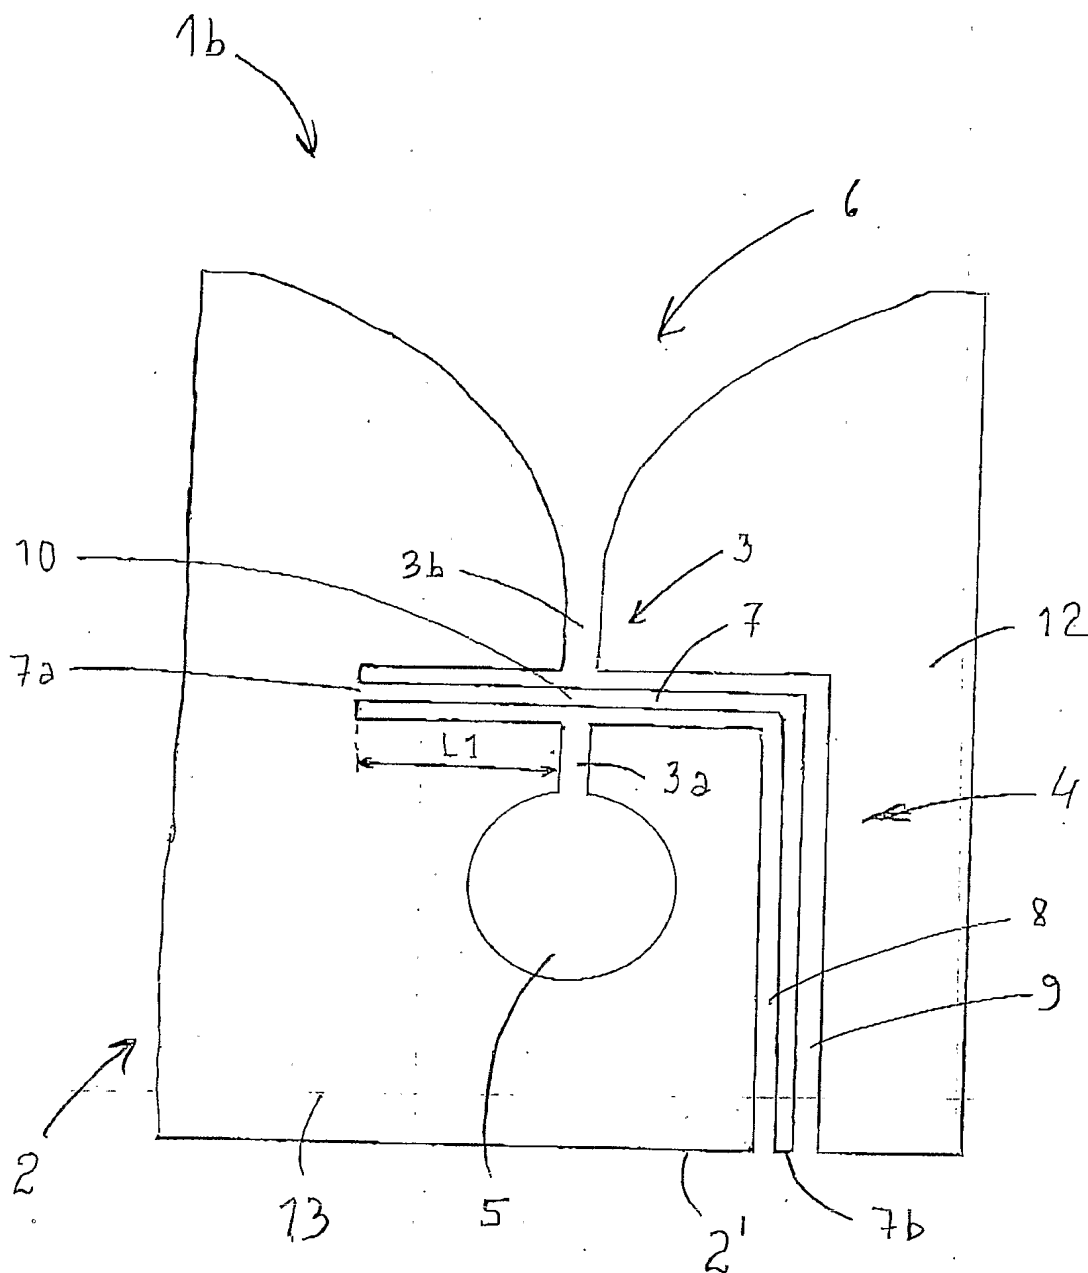


FIG. 2

0317119555

PCT/SE 03 / 0 2 1 0 2

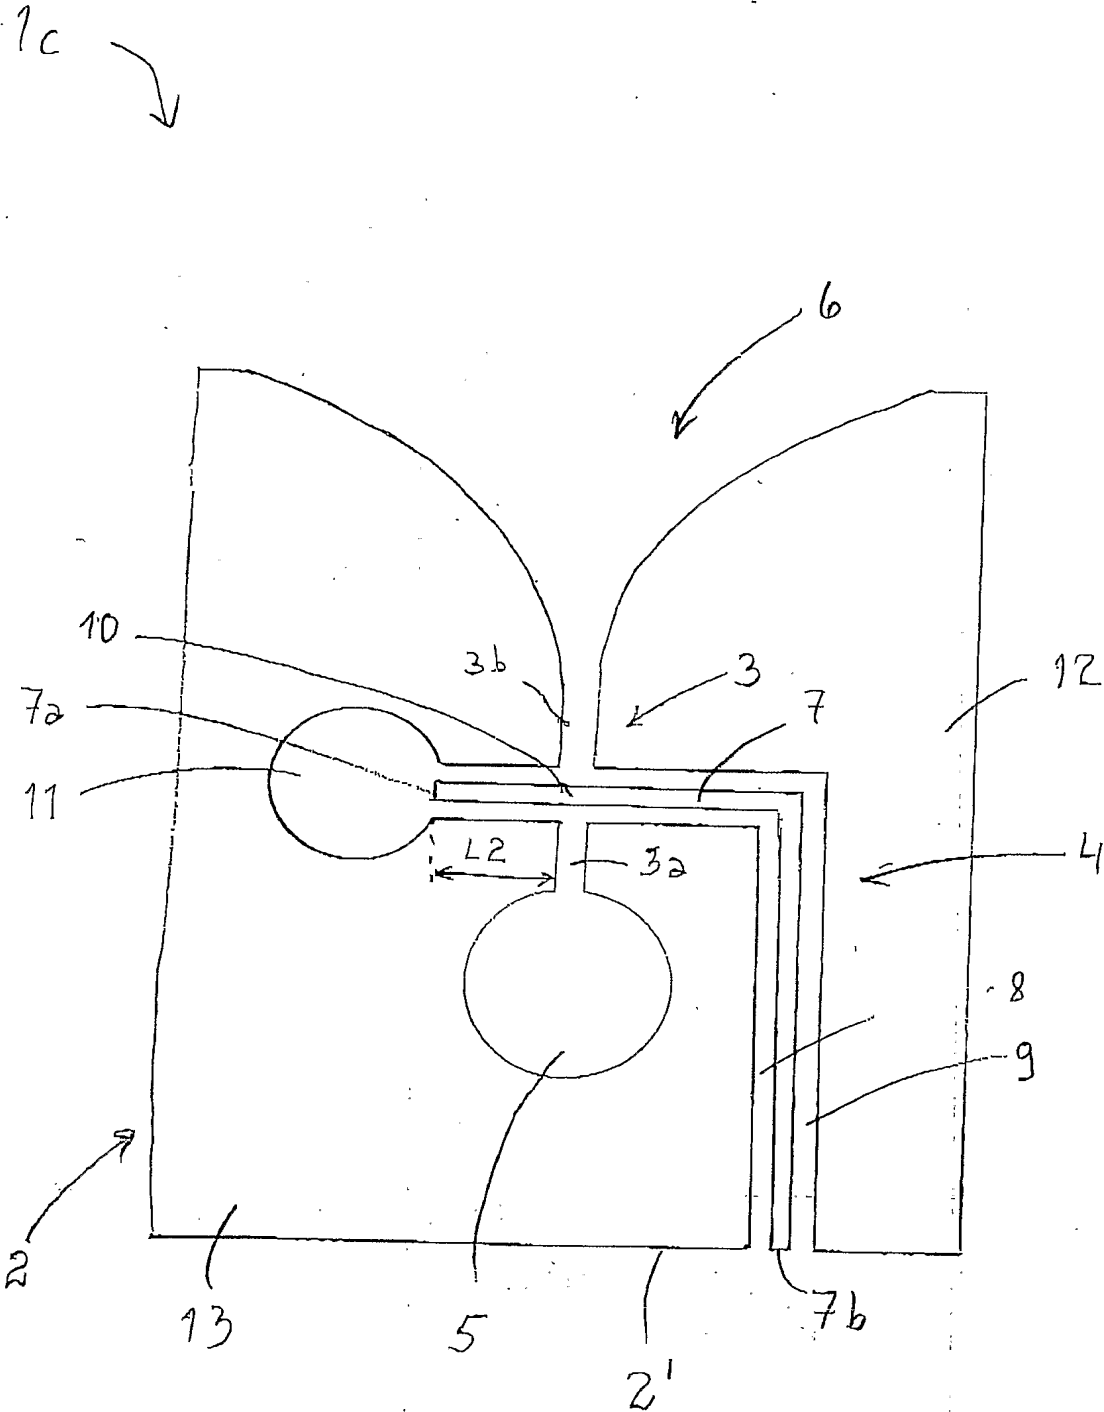


FIG. 3



0317119555

PCT/SE 03/02102

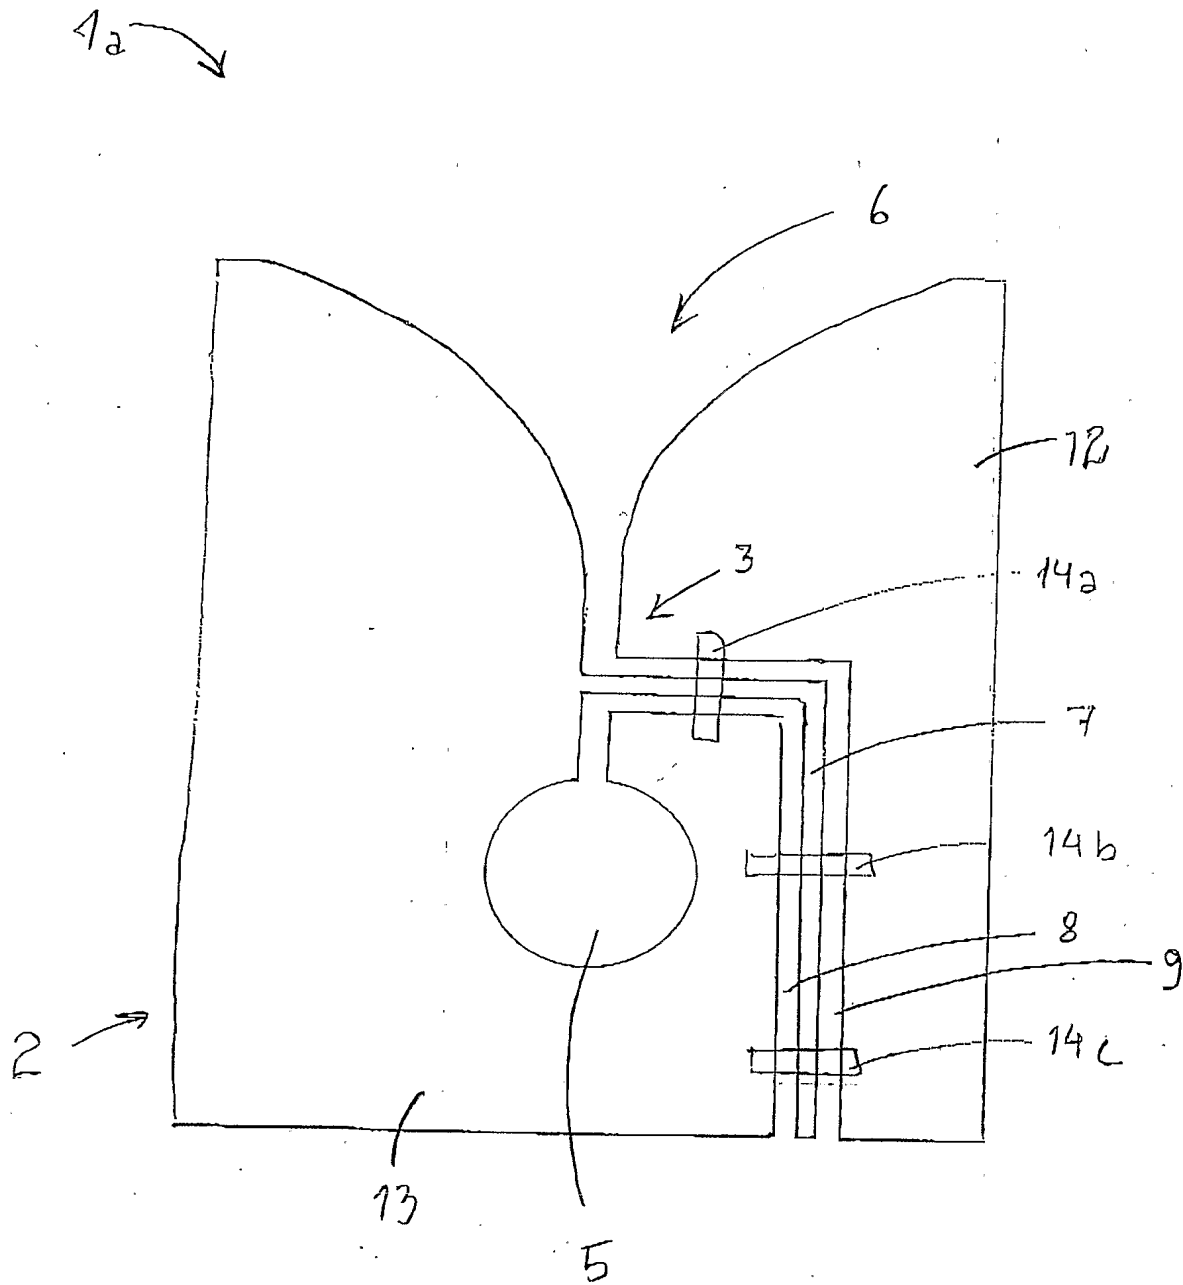
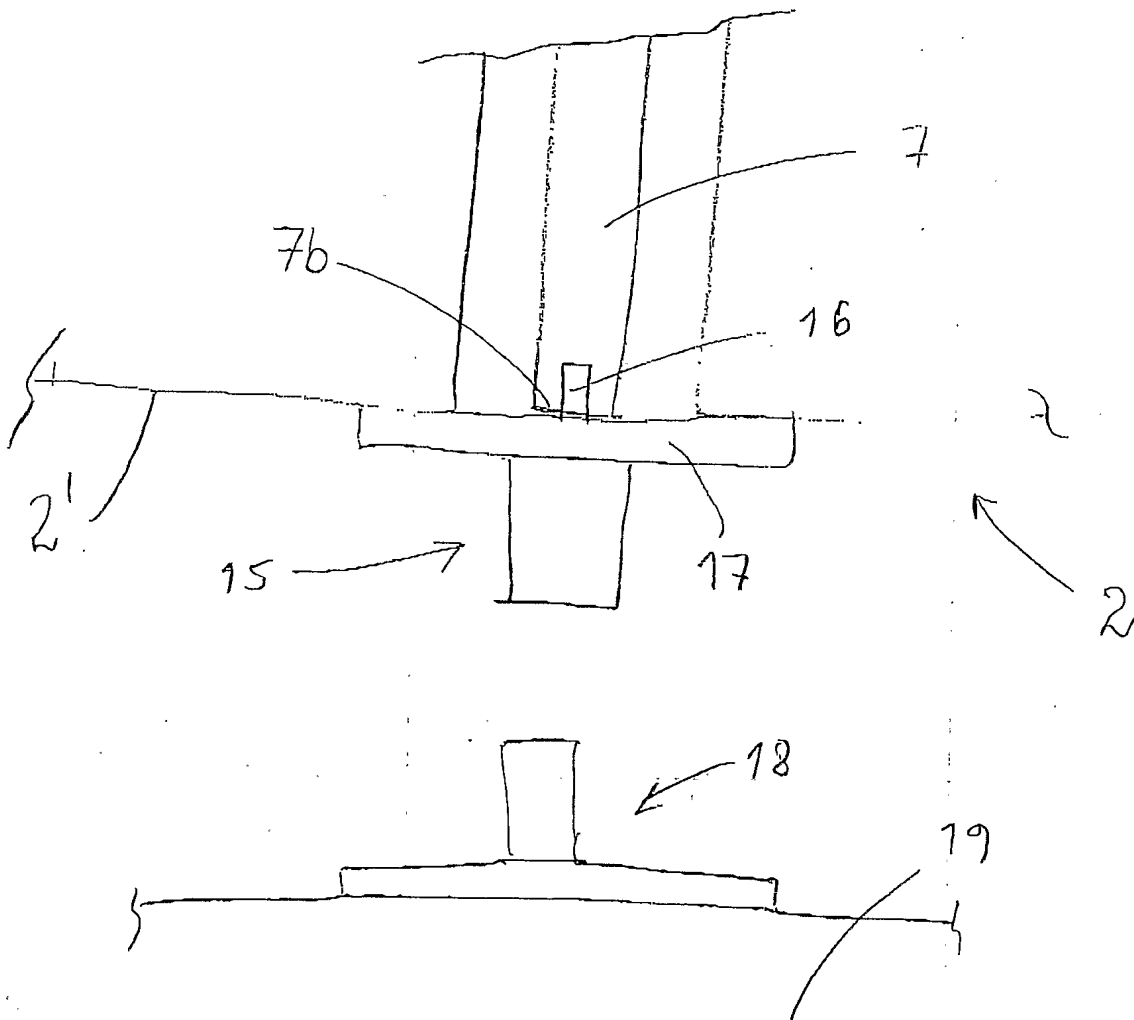


FIG. 4

0317119555

PCT/SE 03 / 0 2 1 0 2

FIG. 5a

0317119555

PCT/SE 03, 02102




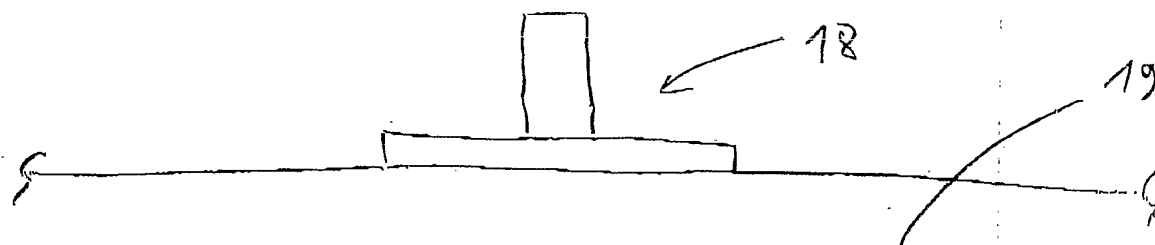


FIG. 5b

0317119555

PCT/SE 03 / 0 2 1 0 2

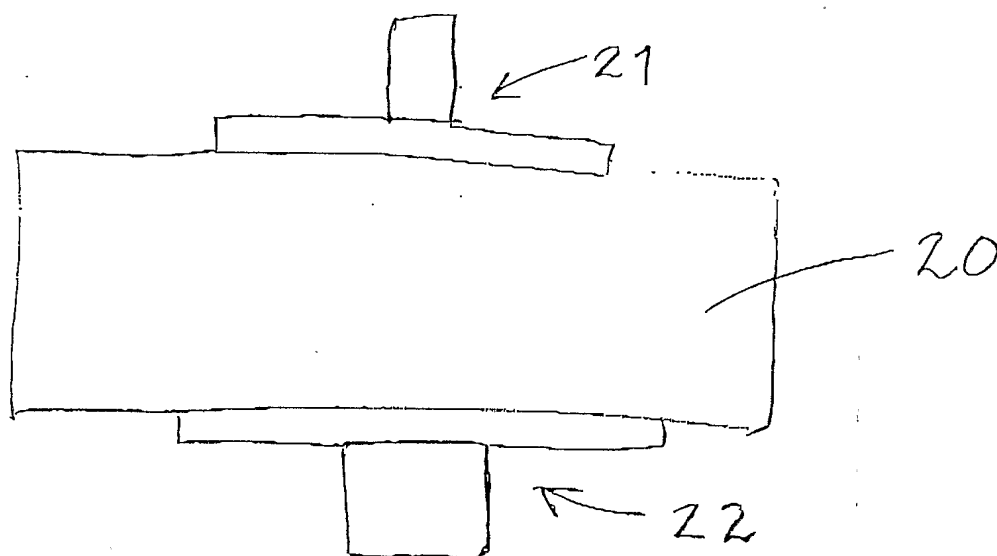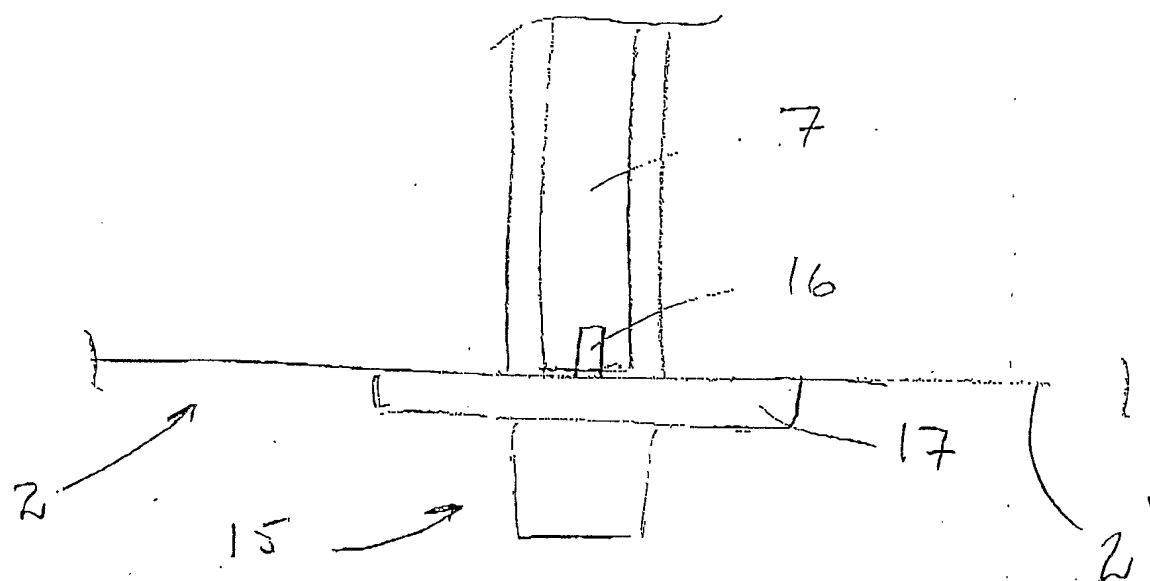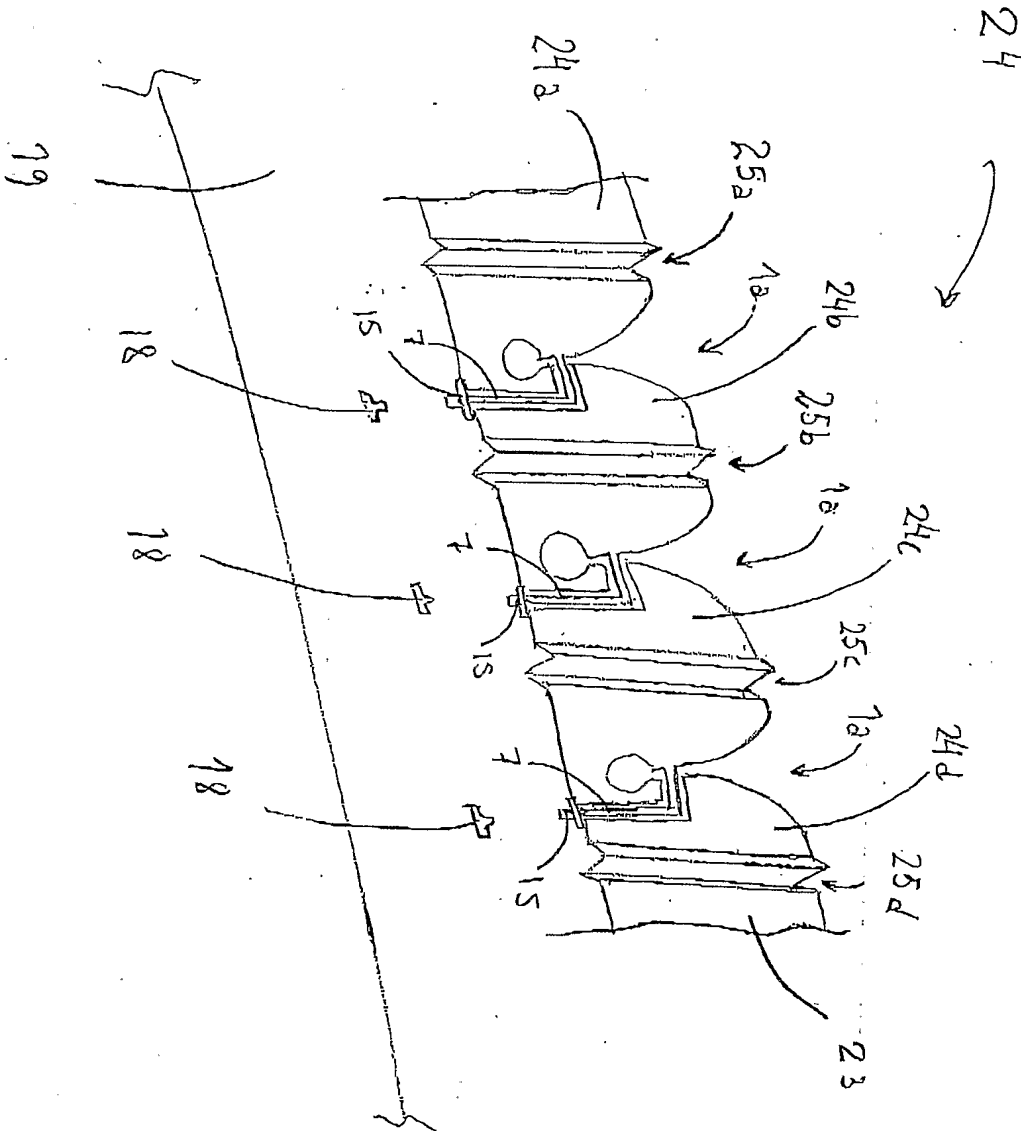

F16.6

0317119555

PCT/SE 03 / 0 2 1 0 2

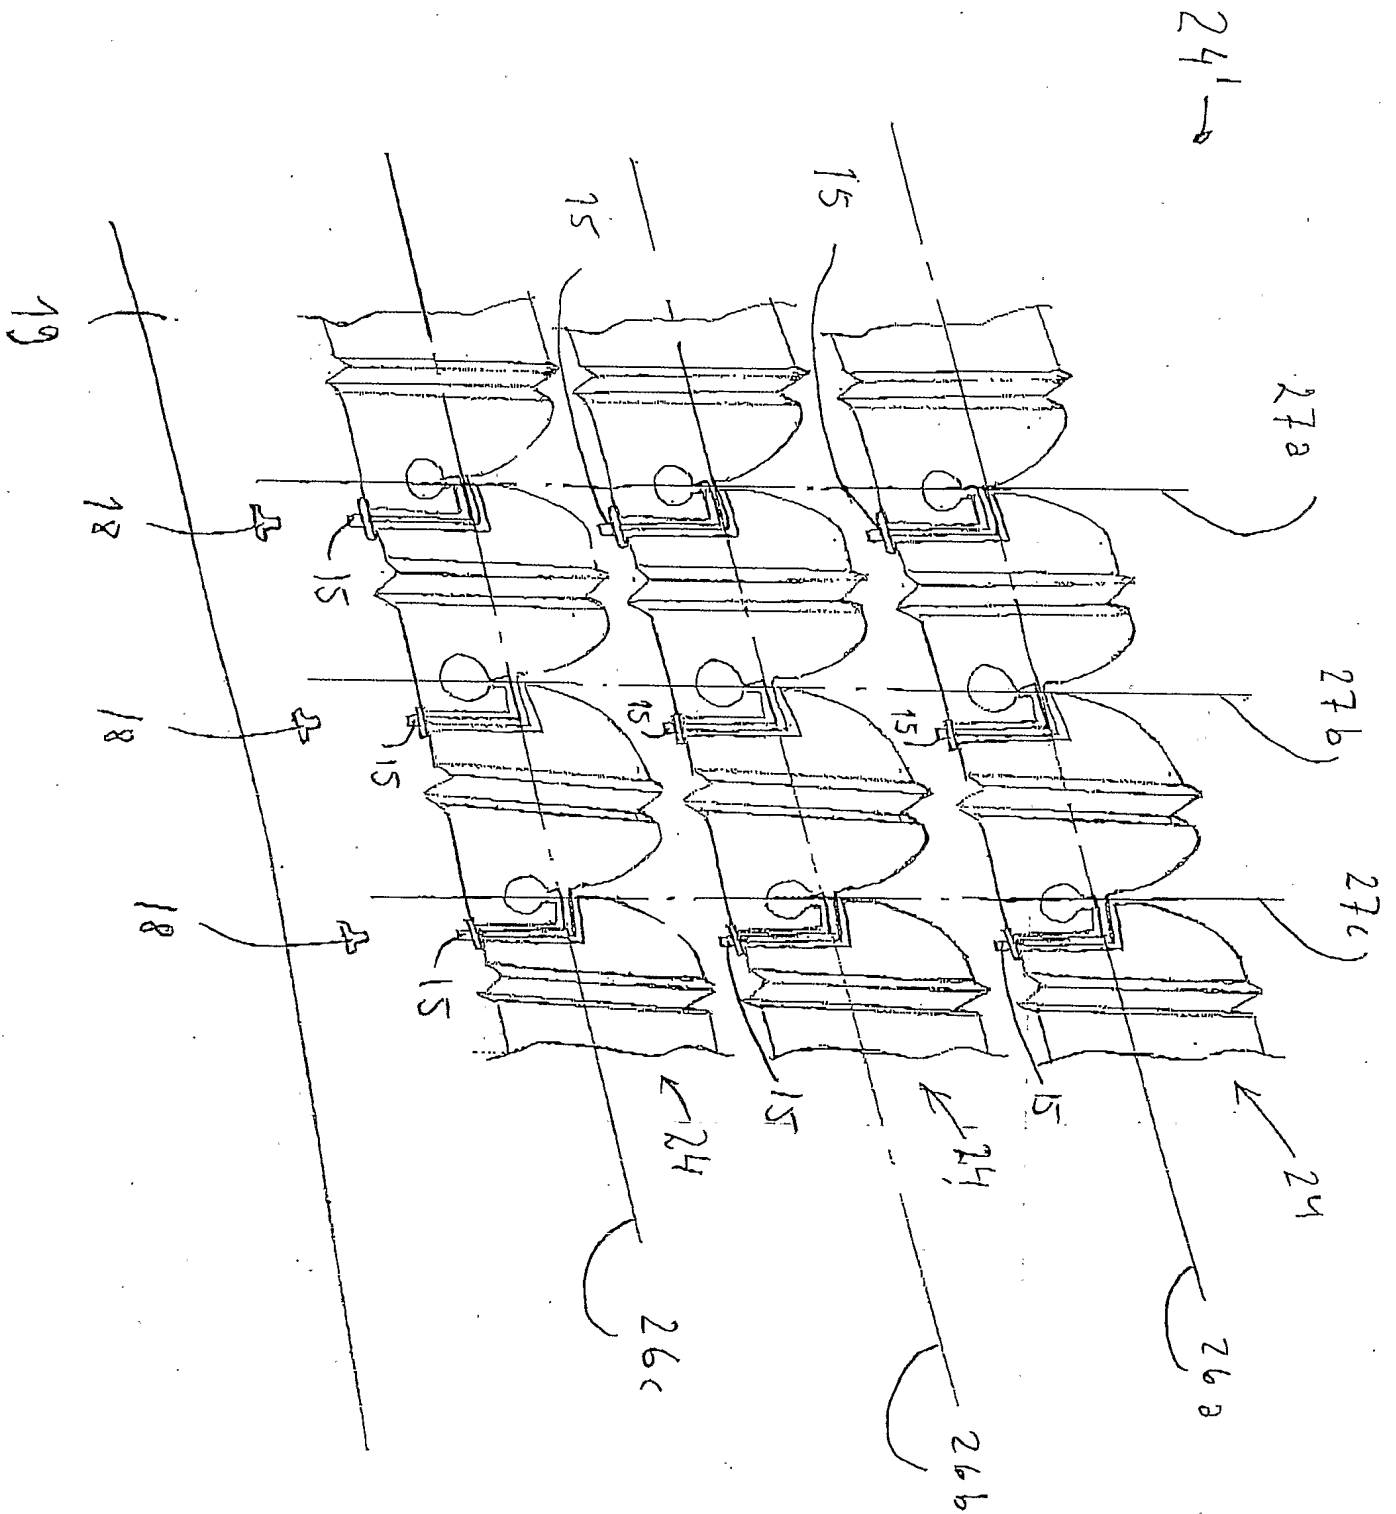


FIG. 7

0317119555

PCT/SE 03 / 0 2 1 0 2

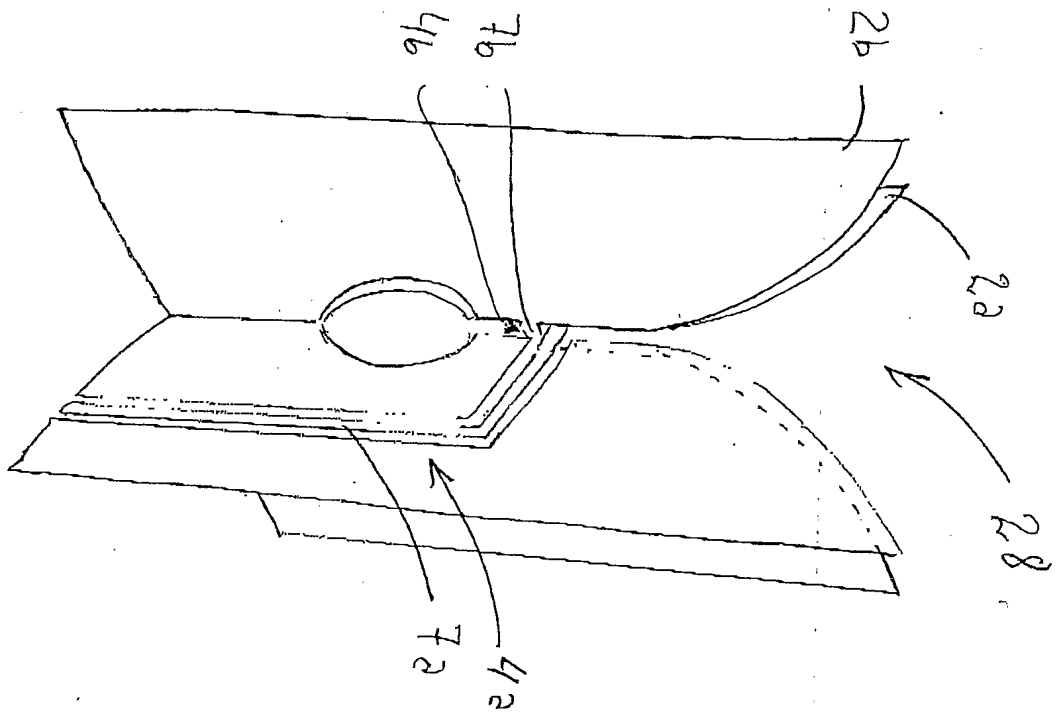


FIG. 8a

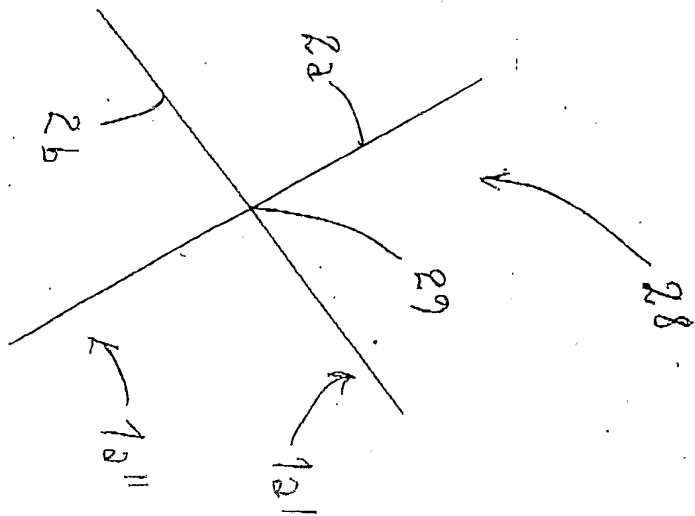


FIG. 8b

0317119555

PCT/SE 03 / 0 2 1 0 2

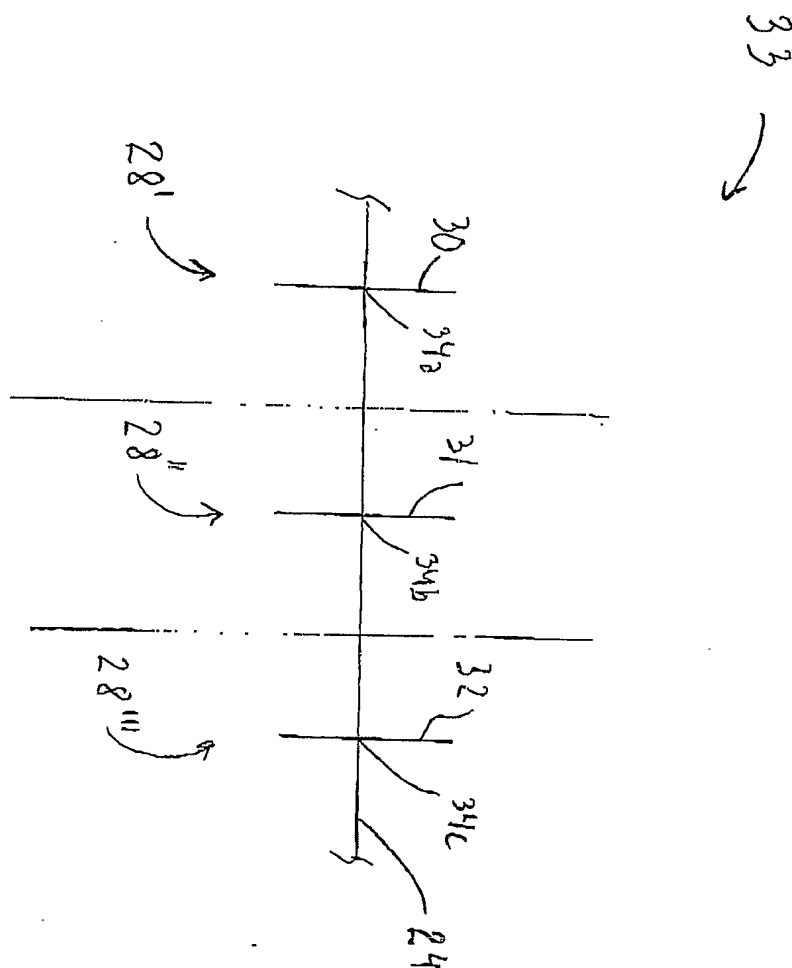


FIG. 9

0317119555

PCT/SE 03 / 0 2 1 0 2

35  
↙

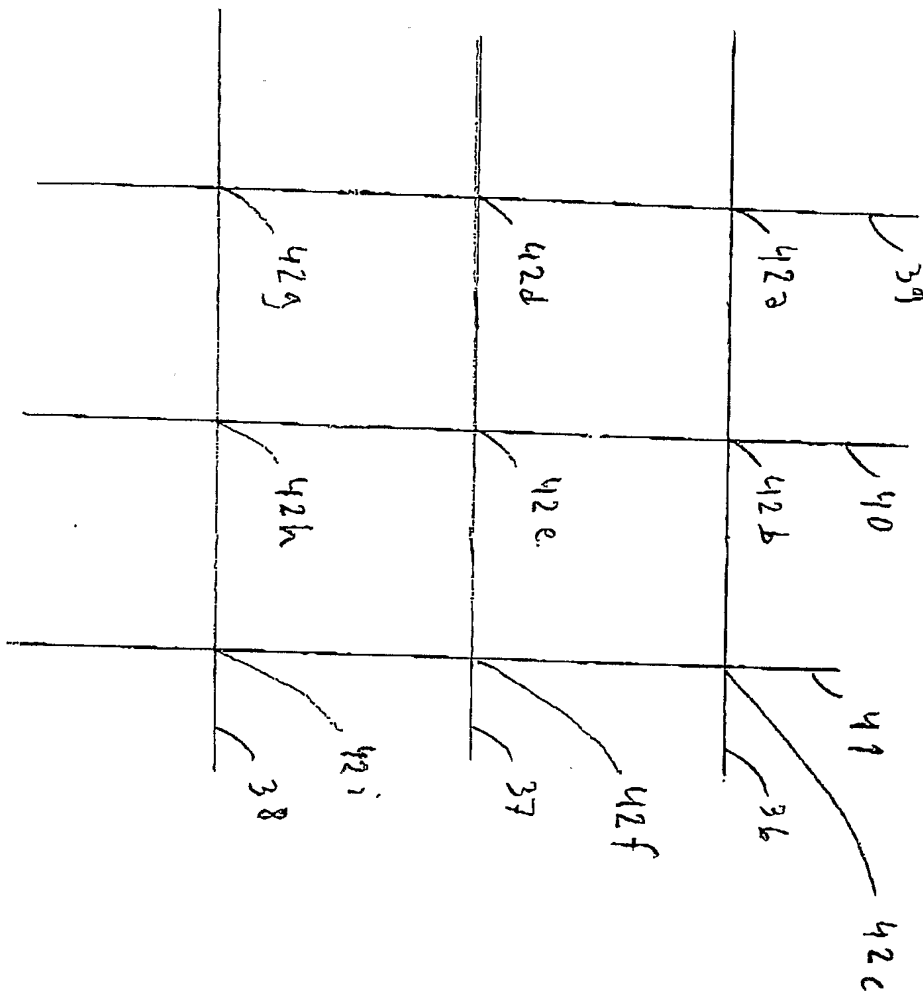


FIG. 10



0317119555

PCT/SE 03 / 0 2 1 0 2

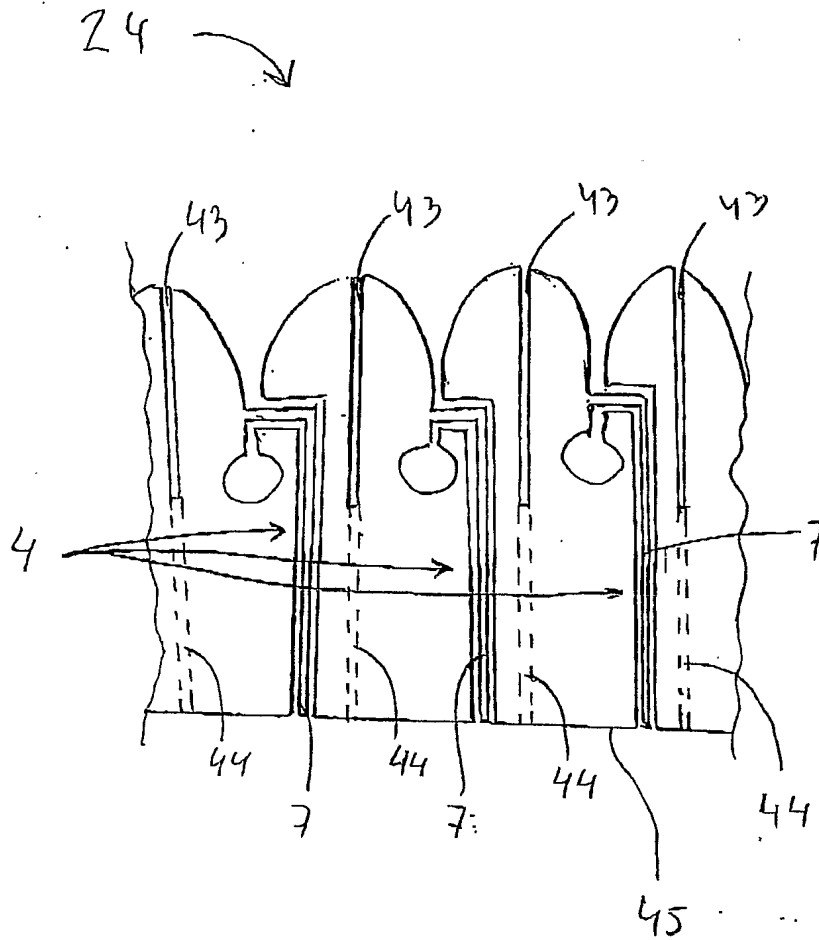


FIG. 11a

0317119555

PCT/SE 03 / 0 2 1 0 2

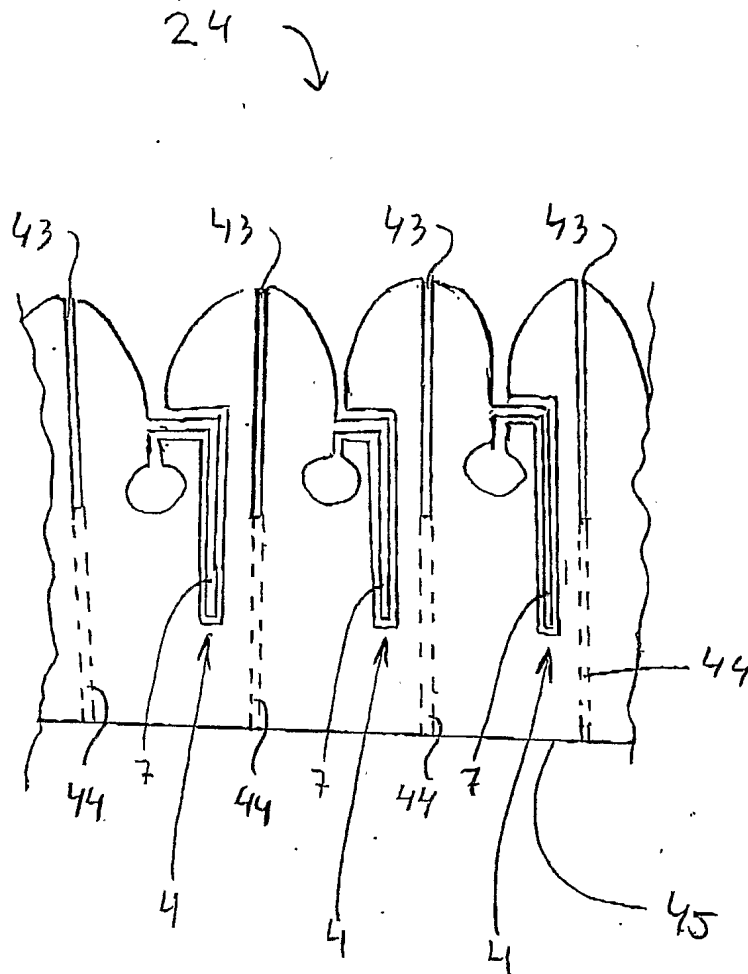


FIG. 11b

0317119555

PCT/ SE 03 / 0 2 1 0 2

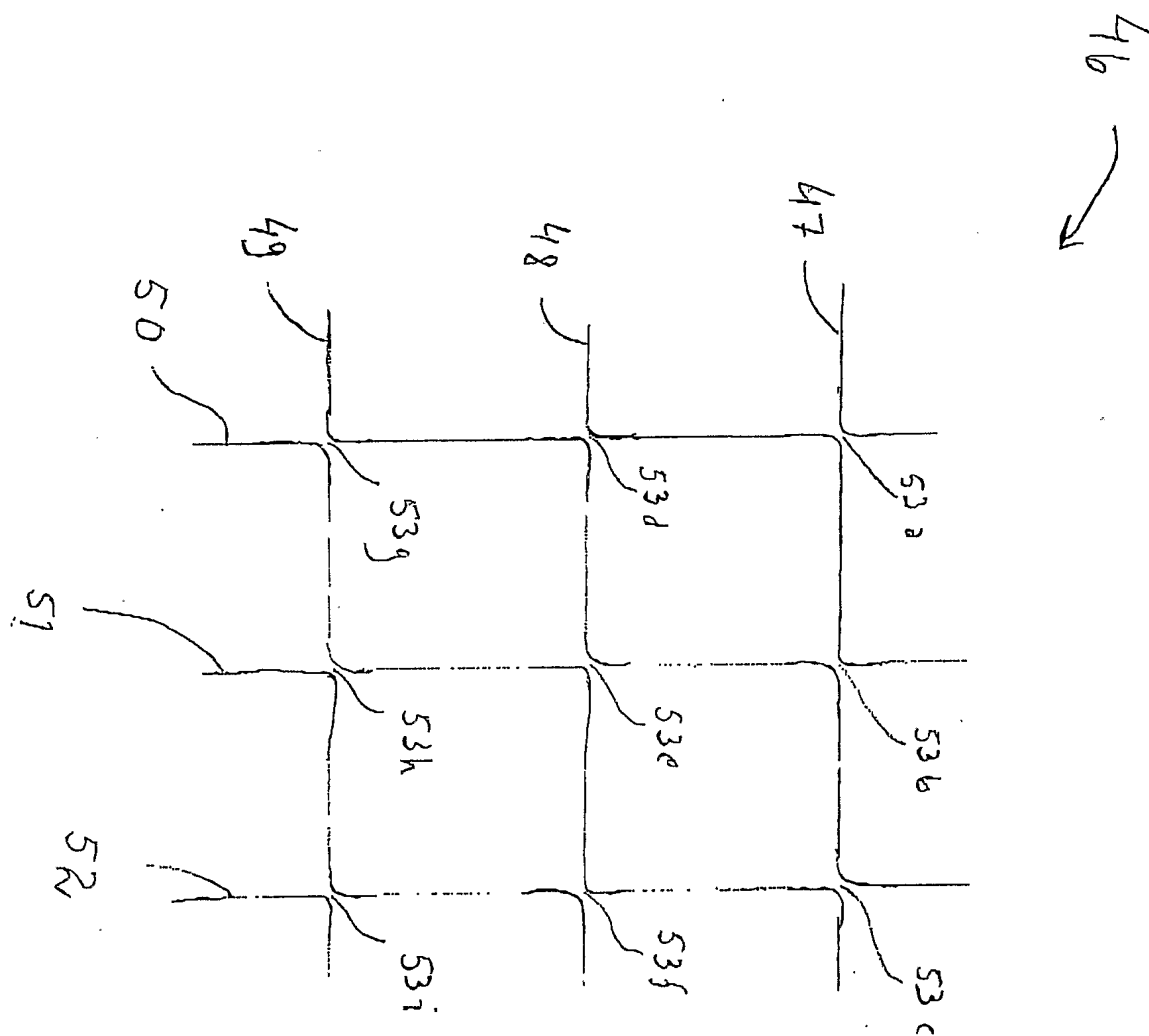


FIG. 12

0317119555

PCT/SE 03 / 0 2 1 0 2

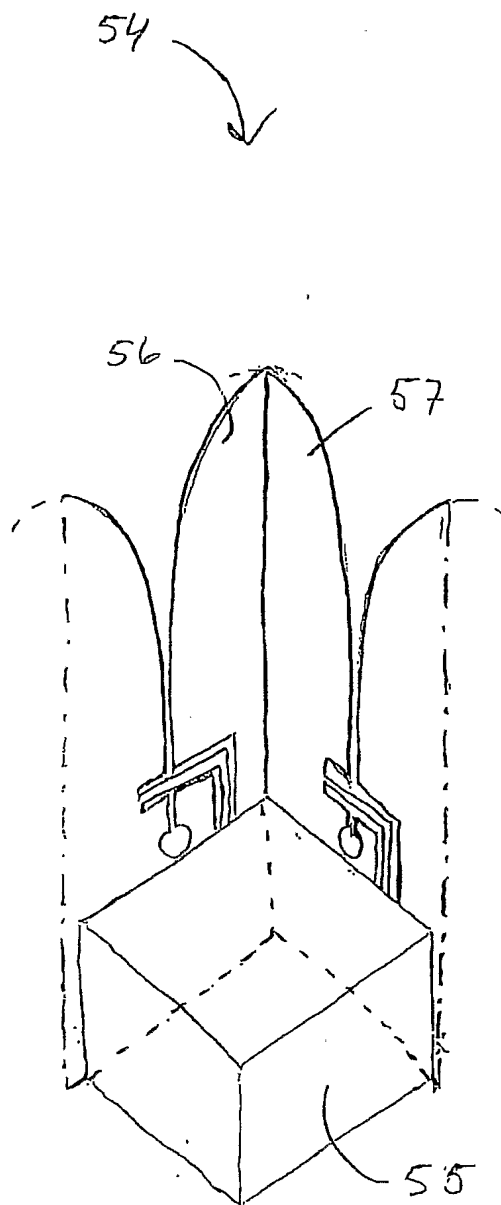


FIG. 13a

0317119555

PCT/SE 03 / 0 2 1 0 2

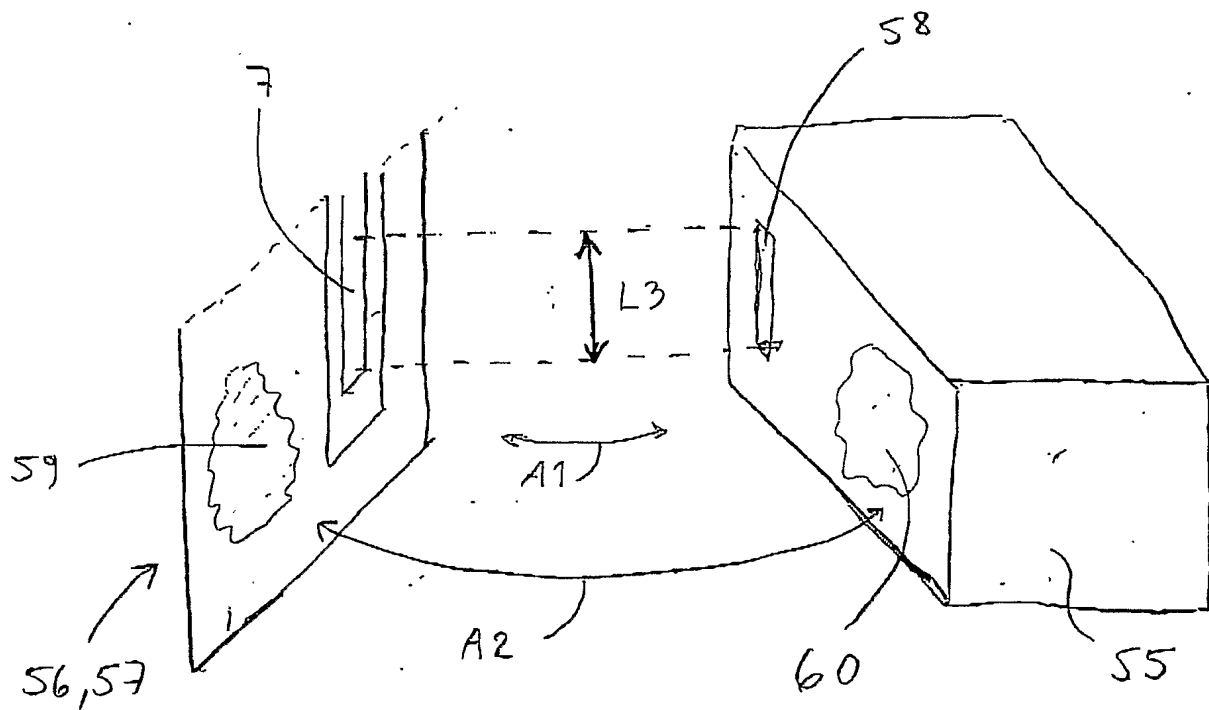


FIG 13b.